


FITTINGS

Wrought Steel Fittings

BS 21 and BS 1740 - 1965 (BSEN 10241:2000)

Continued

PLUGS

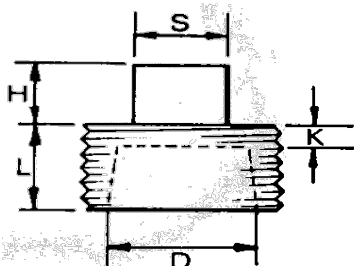

Size		Min. length of thread for basic gauge length L	Approx size of square S	Approx height of square H	Maximum internal diameter D	Minimum thickness of metal K
mm	inches	mm	mm	mm	mm	mm
6	1/8	7	8	8	-	-
8	1/4	10	9	8	-	-
10	3/8	10	11	10	-	-
15	1/2	13	13	10	-	-
20	3/4	15	14	13	-	-
25	1	17	18	13	22	4
32	1 1/4	19	22	16	31	5
40	1 1/2	19	27	16	33	5
50	2	23	32	19	48	5
65	2 1/2	27	37	19	62	7
80	3	30	37	22	73	8
100	4	36	46	25	97	10
125	5	40	51	28	121	12
150	6	40	60	32	144	13

NOTE: Plugs may be either solid or hollow, and the attention of the purchaser is drawn to the necessity of stating in his enquiry and order which pattern is required.