



FITTINGS


Continued

Steel Pipe Fittings


To BS 1387 : 1967 (BSEN 10241:2000)

RUNNING NIPPLES, CLOSE TAPER NIPPLES, BARREL NIPPLES


Parallel threads



Taper threads



Taper threads

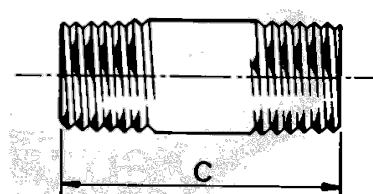

MANUFACTURED FROM
MEDIUM OR HEAVY PIPE

Size		Standard lengths								
		Running nipples			Close taper nipples			Barrel nipples		
		minimum A	tol.		minimum B	tol.		minimum C	tol.	
mm	inches	mm	inches		mm	inches		mm	inches	
6	1/8	13	1/2	+1.5mm (+ 1/16 in)	19	3/4	+1.5mm (+ 1/16 in)	32	1 1/4	+3mm (+ 1/8 in)
8	1/4	19	3/4		27	1 1/16		38	1 1/2	
10	3/8	21	13/16		28	1 1/8		38	1 1/2	
15	1/2	27	1 1/16		37	1 7/16		51	2	+4.5mm (+ 3/16 in)
20	3/4	30	1 3/16		39	1 9/16		54	2 1/8	
25	1	33	1 5/16	+3mm (+ 1/8 in)	46	1 13/16	+3mm (+ 1/8 in)	60	2 3/8	
32	1 1/4	38	1 1/2		51	2		70	2 3/4	+6mm (+ 1/4 in)
40	1 1/2	38	1 1/2		51	2		70	2 3/4	
50	2	48	1 7/8		60	2 3/8		79	3 1/8	+8mm (+ 5/16 in)
65	2 1/2	51	2		69	2 11/16		89	3 1/2	
80	3	57	2 1/4		75	2 15/16		102	4	
100	4	70	2 3/4		87	3 7/16		114	4 1/2	
125	5	78	3 1/16		96	3 3/4		124	4 7/8	
150	6	78	3 1/16		96	3 3/4		127	5	